




Shipline TXOI 250V Instrumentation cable

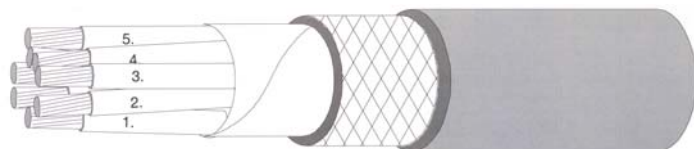

Flame retardant halogen-free instrumentation cable. Braided

TXOI 250V HFXLPE/TCWB/PO

Operating temperature : 90°C
Operating Voltage : 250V

Standards applied

Application

Armoured cable for fixed installation in ships where cable protection is required. Suitable for use on instrumentation and communication systems. Can be installed and operated both indoors and outdoors.

- IEC 60092-376 (2003-05) - Design
- IEC 60228 class 2 - Conductor
- IEC 60092-351 - Insulation
- IEC 60092-359 - Sheath
- IEC 60332-1 - Flame Retardant
- IEC 60332-3-22 - Flame Retardant
- IEC 600754-1,2 - Halogen Free
- IEC 61034-1,2 - Low Smoke

Construction

	Code Letter	
Conductor		Annealed stranded circular copper(SCC), IEC 60228 class 2
Insulation	T	Crosslinked Polyethylene, IEC 60092-351 (HFXLPE)
Pair / Triple / Quad twisting		Numbered white cores are twisted in pairs/triples. (The two pair cable is twisted into a star quad) All the pairs are twisted with different lay length to reduce mutual interference.
Inner covering	X	No inner covering. (Additional tapes may be applied)
Armour/screen	O	Tinned annealed copper wire braid
Tape over armour/screen		Additional tape may be applied
Outer sheath	I	Flame retardant halogen-free thermoplastic compound, SHF1
Marking text		E.g. "meter" "year" DRAKA 01 TXOI 250V 4 PAIR 0,75 mm ² IEC 60092-376 IEC 60332-3-22 ShipLine
Manufacturing unit		DRAKA 01 = Draka Norsk Kabel, DRAKA 02 = Draka Kabel BV Amsterdam, DRAKA 03 = Draka Kabel BV Emmen
Outer sheath colour		Grey



Shipline TXOI 250V Instrumentation cable

Core identification instrumentation cables

The pairs have the following number identification according to IEC 60092-376 - Core no.

Pair no. 1 - 1 - 2

Pair no. 2 - 3 - 4

Pair no. 3 - 5 - 6

Pair no. 4 - 7 - 8

Pair no. 5 - etc - etc

The two pair cable may also be built up as a star quad - 1 - 3 - 2 - 4

The triple cable has the following number identification - 1 - 2 - 3

Range and dimensions

Number of elements	No of cores in element	Cross section core, mm ²	Conductor Diameter, mm	Insulation Thickness, mm	Diameter Braid Wire, mm	Thickness Outer Sheath, mm	Diameter outer sheath, mm	Weight of Cable Approx. (Kg/Km)	Copper content Approx. (kg/km)
1	2	0.5	0.9	0.4	0.2	1	6.5 ± 0.5	65	31
1	4	0.5	0.9	0.4	0.2	1	7 ± 0.5	80	40
1	2	0.75	1.1	0.5	0.2	1	7 ± 0.5	80	42
1	4	0.75	1.1	0.5	0.2	1	8 ± 0.5	105	57
2	2	0.75	1.1	0.5	0.2	1.1	10.5 ± 0.8	130	65
4	2	0.75	1.1	0.5	0.2	1.2	12 ± 0.8	190	100
7	2	0.75	1.1	0.5	0.2	1.2	14.5 ± 0.8	265	149
10	2	0.75	1.1	0.5	0.3	1.4	18.5 ± 0.8	430	254
14	2	0.75	1.1	0.5	0.3	1.4	19.5 ± 1	500	306
19	2	0.75	1.1	0.5	0.3	1.5	21.5 ± 1	630	393
24	2	0.75	1.1	0.5	0.3	1.7	25.5 ± 1	830	506

Electrical values instrumentation cables

Type	Capacitance, approx. (nF/km)	Inductance, approx. (mH/km)	Resistance at 20°C, max. (ohm/km)
Unshielded pair 0,5 mm ²	70	0.60	40.4
Unshielded pair 0,75 mm ²	65	0.60	26.0

Ordering information

Part number	Description	Sheath Colour	Stock item	EAN No. DNK	EL No.	KDN Part number	EAN no. KDN
832400	TXOI 250V 1PAIR 0.5mm ²	GREY	Yes	7021528324006	1045860	127257KK	8711401094636
832402	TXOI 250V 1QUAD 0.5mm ²	GREY	Yes	7021528324020	1045861	127258KK	8711401094643
832450	TXOI 250V 1PAIR 0.75mm ²	GREY	Yes	7021528324501	1045870	124931KK	8711401019097
832452	TXOI 250V 1QUAD 0.75mm ²	GREY	Yes	7021528324525	1045871	124933KK	8711401019127
832456	TXOI 250V 4PAIR 0.75mm ²	GREY	Yes	7021528324563	1045872	124934KK	8711401019134
832458	TXOI 250V 7PAIR 0.75mm ²	GREY	Yes	7021528324587	1045873	124936KK	8711401094544
832460	TXOI 250V 10PAIR 0.75mm ²	GREY	Yes	7021528324600	1045874	124937KK	8711401019165
832462	TXOI 250V 14PAIR 0.75mm ²	GREY	Yes	7021528324624	1045875	124938KK	8711401094568
832464	TXOI 250V 19PAIR 0.75mm ²	GREY	Yes	7021528324648	1045876	124939KK	8711401094582
832466	TXOI 250V 24PAIR 0.75mm ²	GREY	Yes	7021528324662	1045877	124940KK	8711401019196

Installation recommendations

Minimum Bending Radius during Installation	Minimum Bending Radius Fixed Installed	Maximum Tensile Load During Installation	Minimum Installation Temperature
8 x D	6 x D	50 N /mm ²	-10°C